Rectronic 4U compact power systems design provides 24V, 48V or 60V DC, power output from 1500W to 6.0kW and have a maximum output current of 125A.

The system is intended to be a complete power system in a box, All the AC, load and battery connections are made at the rear of the unit.

The system is designed to be extremely simple to install and set up.


- Ultra compact size means more room for revenue generating equipment.
- Single phase input terminals.
- World leading power density.
- Fully featured telecom grade rectifiers.
- Network monitoring available.
- Modular 19 design for ease of installation.
- High reliability means less cost of maintenance.
- Full remote monitoring available means less site visits and less cost.



6.0kW Maximum Output Power

24/48/60V



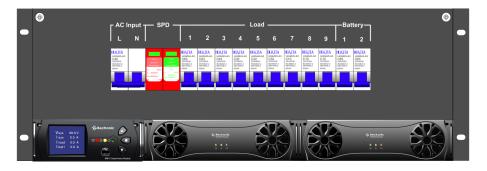

Specifications AC Input: Single phase (refer to rectifier spec for full details, L, N, E 10mm² tunnel terminals) Load circuit breakers: 63A/1Px 3, 32A/1Px 3,10A/1Px 3. (10mm² rear connect tunnel DC Distribution: terminals) Battery circuit breakers: 63A/1Px 2. (35mm² rear connect tunnel terminals) -25°C to +65°C(maximum output power is derated above +55°C) Operating Temperature: Storage Temperature: -45°C to +70°C Humidity: 5-95% RH (non-condensing) Altitude: <2500m, de-rate maximum ambient temperature by 4°C per 1000m above sea level Mechanical Dimensions W. H. D: 482.6mm, 178mm, 380mm Weight: <19.5kg(including rectifier modules) S stem Numbers 4U Ultra compact system, 2x RM1524A modular rectifiers, 9x load, 2x battery, 1x SM12 RTC024150204U: supervisory module. 4U Ultra compact system, 2x RM3048A modular rectifiers, 9x load, 2x battery, 1x SM12 RTC048300204U: supervisory module. 4U Ultra compact system, 2x RM3060A modular rectifiers, 9x load, 2x battery, 1x SM12 RTC060300204U: supervisory module. **Configuration Options** RM3060A/RM3048A, 3.0kW modular rectifier, 220V AC input, 60V or 48V DC output Rectifiers: RM1524A, 1.5kW modular rectifier, 220V AC input, 24V DC output Supervisory Modules: SM12

45

Due to product development specifications are subject to change without prior notice. Pictures may be representative, actual products may differ.