

POM PDU

POM PDU provides remote manual control of the critical devices by clicking on a few buttons on the smart phone or computer webpage. Stop the problem device by cutting off the power to a specific outlet. By cycling the power off and restarting the device remotely, you save time and money by eliminating the need to send technicians to the root cause of the problem.

Managers can monitor the power usage information of each output port from the remote end through the Internet to fully understand the power consumption of all the devices. Set up overload event alerts and notify managers via Email and TRAP, allowing managers to respond to crises in the shortest possible time to minimize disasters.

POM has one environmental sensor ports that track climate information: temperature and humidity environment variables. The data is available from any web browser and is SNMP-compliant for easy tracking of critical data without the use of any external software.

Provide central management software, which can manage a large number of PDUs' power, temperature and humidity information. The database stores the power consumption information of the power strip and provides the history curve chart for the manager's reference.

Features:

System Function:

- ⌘ Built-in embedded system:
Support 10M Ethernet interface, provides webpage and SNMP remote management.
- ⌘ Multiple protocols:
Support ICMP, ARP, IP, TCP, UDP, DHCP, HTTP, NTP, SNMP v1.
- ⌘ Local display information:
Seven-segments can display current, web site and temperature and humidity values.

Power Management:



REMOTE
MONITOR

Remote Monitor

Remote monitoring PDU status by web and SNMP



REMOTE
CONTROL

Remote Control

Remote per outlet on/off by web and SNMP.



CURRENT
MEASUREMENT

Current Measurement

Measure PDU total current consumption.



MAIL
NOTIFICATION

Mail Notification

Notify specified user by mail and SNMP when outlet action or current over threshold.



THRESHOLD
SENSING

Threshold Sensing

User-definable warning and overload threshold value as the basis for alarm.



EVENT
ALERT

Event Alert

When current exceeds the preset threshold, PDU will beep and LED will flash.



Power Sequence

User-definable power on/off sequence time.



Schedule Control

Timed & scheduled on/off/reboot control.



Ping Event Control

When the specified IT device does not respond to PING, the output will perform a preset power action.



Overload Protection

When overload, circuit breaker will automatically trip to protect the safety of electricity.



Group Control

Set multiple outlets as a single group while controlling the power output.



Outlet-Level Monitor

Remote per outlet current monitoring.



Environment Detection

Optional accessory probe to detect temperature and humidity.



kWh Measurement

Voltage, frequency, power factor, active power, apparent power and kWh measurement. (available by model)



Central Management

Free centralized monitoring software, real-time monitoring of a large number of PDU, provide data records and history chart.

Model List

Model Number	Output	Input	Voltage	Capacity
PSH-1623K-08N8	(8) IEC 320 C13	Inlet IEC320 C20 Power cord, C19 to C20, 3m	230V	16 Amp
PSH-3223C-08N8	(8) IEC 320 C13	IEC309, power cord, 3m	230V	32 Amp
P2H-3223C-08N8	(8) IEC 320 C19	(2) IEC309, power cord, 3m	230V	64 Amp
PDH-1623K-08N8	(8) IEC 320 C13	Inlet IEC320 C20 Power cord, C19 to C20, 3m	230V	16 Amp
PHH-1623K-08N8	(8) IEC 320 C13	Inlet IEC320 C20 Power cord, C19 to C20, 3m	230V	16 Amp
PSH-1511A-08N8	(8) NEMA 5-15/20R	Inlet IEC320 C20 Power cord, C19 to NEMA 5-15P, 3m	115V	15 Amp
PSH-2011B-08N8	(8) NEMA 5-15/20R	Inlet IEC320 C20 Power cord, C19 to NEMA 5-20P, 3m	115V	20 Amp
PHH-1511A-08N8	(8) NEMA 5-15/20R	Inlet IEC320 C20 Power cord, C19 to NEMA 5-15P, 3m	115V	15 Amp
PSH-3020P-08N8	(8) IEC 320 C13	NEMA L6-30P, power cord, 3m	208V	30 Amp
P2H-3020P-08N8	(8) IEC 320 C19	(2) NEMA L6-30P, power cord, 3m	208V	60 Amp

PSH-1623K-08N8



Specification

Output		Input	
Voltage	200-240 VAC	Voltage	200-240 VAC
Max. Current	16 A	Frequency	50/60Hz, full range
Outlet	(8) IEC320 C13	Max. Capacity	3680 VA
		Connection	IEC320 C20
		Overload Protection	Circuit breaker (UL1077)
Measurement		Other	
Current	+/-2%+/-0.1A @0.2A ~ 20A	ENV Connection	RJ11
Dimension/Weight		Operation	
Net Size	432 x 162 x 44.5 mm	Operation Temp.	0 ~ 45°C
Net Weight	3.5 kg	Operation Humid.	0% ~ 90% RH
Package Size	505 x 210 x 90 mm	Storage Temp.	-20°C ~ 65°C
Package Weight	3.8 kg	Storage Humid.	0% ~ 90% RH
Approval			
Certification	CE, FCC		
Warranty	2 years		

Package


No.	Description
1	PDU 1 set
2	Rack mount accessories 1 set
3	Software CD (manual, MIB)
4	C19 to C20, power cord, 3m

Accessory

Model Number	Model Name
CPM-ENV-2	Temp./Humidity probe (ENV)
STR-C14-B	C13 socket protection



Line Drawing

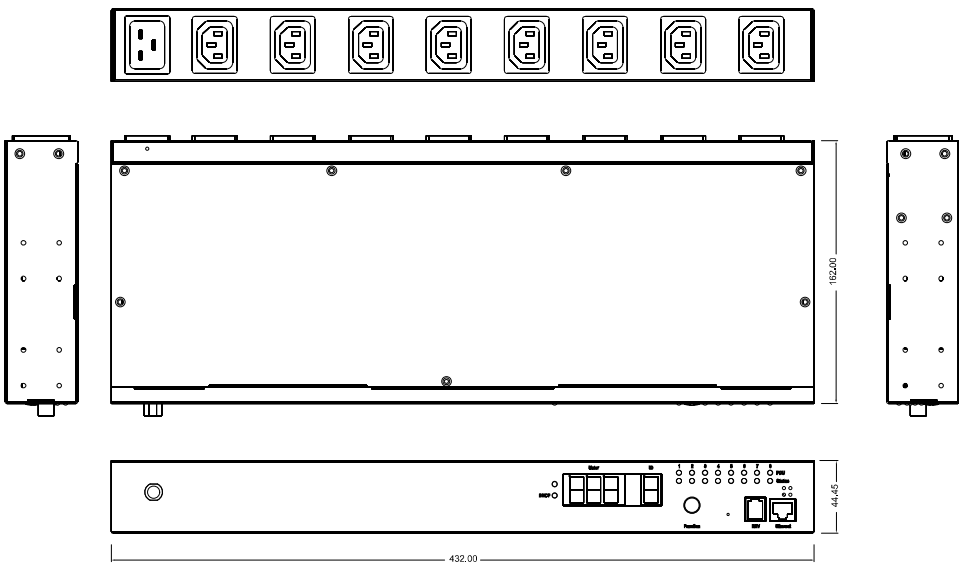

PSH-3223C-08N8

Front view



Back view



Plug



Specification

Output		Input	
Voltage	200-240 VAC	Voltage	200-240 VAC
Max. Current	32 A	Frequency	50/60Hz, full range
Outlet	(8) IEC320 C13	Max. Capacity	7360 VA
		Connection	IEC309, power cord, 3m
		Overload Protection	(2) 16A circuit breaker (UL1077)
Measurement		Other	
Current	+/-2%+/-0.1A @0.2A ~ 20A	ENV Connection	RJ11
Dimension/Weight		Operation	
Net Size	432 x 162 x 44.5 mm	Operation Temp.	0 ~ 45°C
Net Weight	4.0 kg	Operation Humid.	0% ~ 90% RH
Package Size	490 x 330 x 155 mm	Storage Temp.	-20°C ~ 65°C
Package Weight	4.6 kg	Storage Humid.	0% ~ 90% RH
Approval			
Certification	CE, FCC		
Warranty	2 years		

Package


No.	Description
1	PDU 1 set
2	Rack mount accessories 1 set
3	Software CD (manual, MIB)

Accessory

Model Number	Model Name
CPM-ENV-2	Temp./Humidity probe (ENV)
STR-C14-B	C13 socket protection



Line Drawing

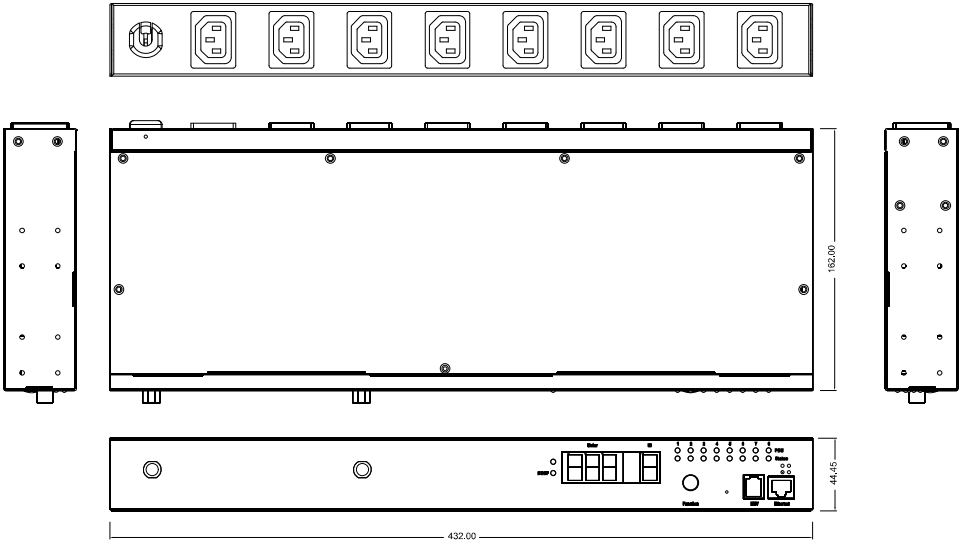

P2H-3223C-08N8

Front view



Back view



Plug



Specification

Output		Input	
Voltage	200-240 VAC	Voltage	200-240 VAC
Max. Current	2 x 32 A	Frequency	50/60Hz, full range
Outlet	(8) IEC320 C19	Max. Capacity	1.47 kVA
		Connection	(2) IEC309, power cord, 3m
		Overload Protection	(4) 16A circuit breaker (UL1077)
Measurement		Other	
Current	+/-2%+/-0.1A @0.2A ~ 20A	ENV Connection	RJ11
Dimension/Weight		Operation	
Net Size	432 x 216 x 44.8 mm	Operation Temp.	0 ~ 45°C
Net Weight	4.0 kg	Operation Humid.	0% ~ 90% RH
Package Size	490 x 330 x 155 mm	Storage Temp.	-20°C ~ 65°C
Package Weight	4.6 kg	Storage Humid.	0% ~ 90% RH
Approval			
Certification	CE, FCC		
Warranty	2 years		

Package


No.	Description
1	PDU 1 set
2	Rack mount accessories 1 set
3	Software CD (manual, MIB)

Accessory


Model Number	Model Name
CPM-ENV-2	Temp./Humidity probe (ENV)
STR-C14-B	C13 socket protection



Line Drawing

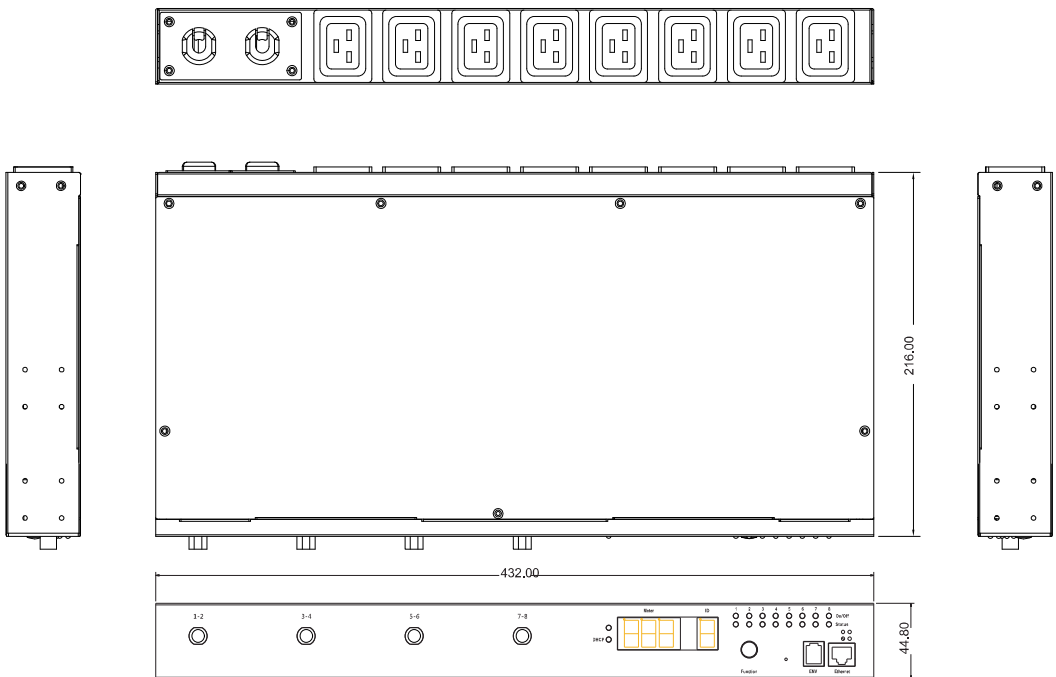

PDH-1623K-08N8

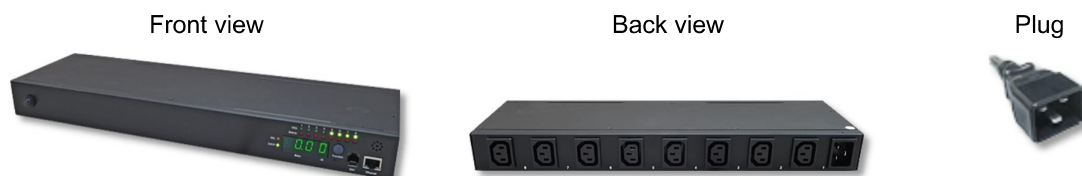

Specification

Output		Input	
Voltage	200-240 VAC	Voltage	200-240 VAC
Max. Current	16 A	Frequency	50/60Hz, full range
Outlet	(8) IEC320 C13	Max. Capacity	3680 VA
		Connection	IEC320 C20
		Overload Protection	Circuit breaker (UL1077)
Measurement		Other	
Current	+/-8%+/-0.1A @0.2A ~ 20A	ENV Connection	RJ11
Voltage	+/- 1% +/- 1V @80V~260V		
Active Power	+/- 1% +/- 5W @50W~8000W		
Apparent Power	+/- 1% @50VA~8000VA		
Frequency	+/- 1% @50~65Hz		
Power Factor	+/- 1% @0.1~1.0		
kWh	.001kWh~99999.999kWh, (+/- 1% @50W~8000W) kh=1.0		
Dimension/Weight		Operation	
Net Size	432 x 130 x 44.5 mm	Operation Temp.	0 ~ 45°C
Net Weight	2.5 kg	Operation Humid.	0% ~ 90% RH

Package Size 505 x 210 x 90 mm

Storage Temp. -20℃ ~ 65℃

Package Weight 2.8 kg

Storage Humid. 0% ~ 90% RH

Approval

Certification CE, FCC

Warranty 2 years

Package



No.	Description
1	PDU 1 set
2	Rack mount accessories 1 set
3	Software CD (manual, MIB)
4	C19 to C20, power cord, 3m

Accessory


Model Number	Model Name
CPM-ENV-2	Temp./Humidity probe (ENV)
STR-C14-B	C13 socket protection



Line Drawing

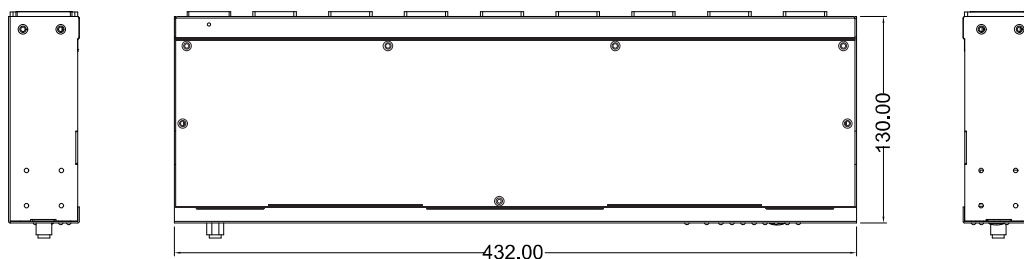

PHH-1623K-08N8

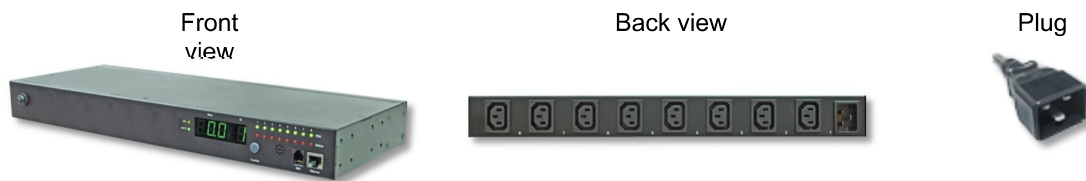

Specification

Output		Input	
Voltage	200-240 VAC	Voltage	200-240 VAC
Max. Current	16 A	Frequency	50/60Hz, full range
Outlet	(8) IEC320 C13	Max. Capacity	3680 VA
		Connection	IEC320 C20
		Overload Protection	Circuit breaker (UL1077)
Measurement		Other	
Current	+/-2%+/-0.1A @0.2A ~ 20A	ENV Connection	RJ11
Voltage	+/- 1% +/- 1V @80V~260V		
Active Power	+/- 1% +/- 5W @50W~8000W		
Apparent Power	+/- 1% @50VA~8000VA		
Frequency	+/- 1% @50~65Hz		
Power Factor	+/- 1% @0.1~1.0		
kWh	.001kWh~99999.999kWh, (+/- 1% @50W~8000W) kh=1.0		
Dimension/Weight		Operation	
Net Size	432 x 216 x 44.5 mm	Operation Temp.	0 ~ 45℃
Net Weight	3.8 kg	Operation Humid.	0% ~ 90% RH

Package Size 490 x 330 x 155 mm

Storage Temp. -20°C ~ 65°C

Package Weight 4.4 kg

Storage Humid. 0% ~ 90% RH

Approval

Certification CE, FCC

Warranty 2 years

Package


No.	Description
1	PDU 1 set
2	Rack mount accessories 1 set
3	Software CD (manual, MIB)
4	C19 to C20, power cord, 3m

Accessory

Model Number	Model Name
CPM-ENV-2	Temp./Humidity probe (ENV)
STR-C14-B	C13 socket protection



Line Drawing

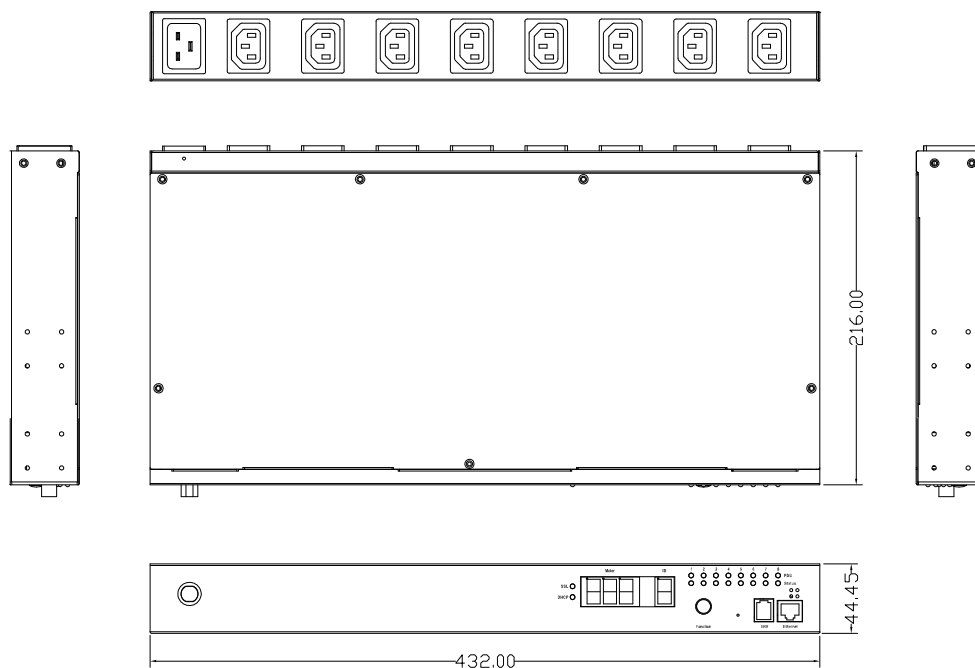

PSH-1511A-08N8

Front view



Back view



Plug



Specification

Output		Input	
Voltage	100-127 VAC	Voltage	100-127 VAC
Max. Current	15 A	Frequency	50/60Hz, full range
Outlet	(8) NEMA 5-15/20R	Max. Capacity	1800 VA
		Connection	IEC320 C20
		Overload Protection	Circuit breaker (UL1077)
Measurement		Other	
Current	+/-2%+/-0.1A @0.2A ~ 20A	ENV Connection	RJ11
Dimension/Weight		Operation	
Net Size	432 x 162 x 44.5 mm	Operation Temp.	0 ~ 45°C
Net Weight	3.5 kg	Operation Humid.	0% ~ 90% RH
Package Size	505 x 210 x 90 mm	Storage Temp.	-20°C ~ 65°C
Package Weight	3.8 kg	Storage Humid.	0% ~ 90% RH
Approval			
Certification	CE, FCC		
Warranty	2 years		


Package

No.	Description
1	PDU 1 set
2	Rack mount accessories 1 set
3	Software CD (manual, MIB)
4	C19 to NEMA 5-15P, power cord, 3m

Accessory

Model Number	Model Name
CPM-ENV-2	Temp./Humidity probe (ENV)

Line Drawing

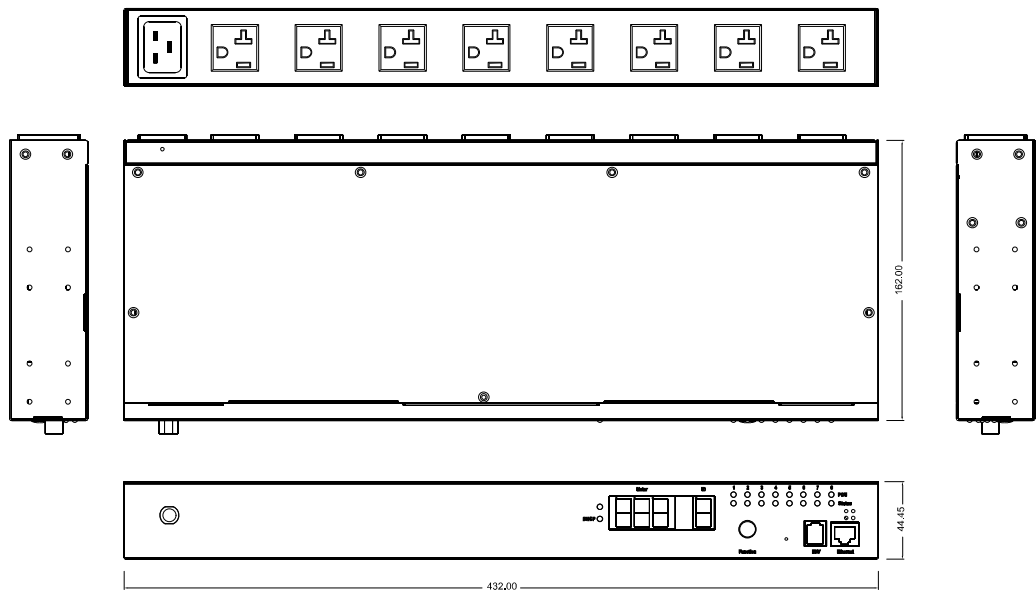

PSH-2011B-08N8



Specification

Output		Input	
Voltage	100-127 VAC	Voltage	100-127 VAC
Max. Current	15 A	Frequency	50/60Hz, full range
Outlet	(8) NEMA 5-15/20R	Max. Capacity	3680 VA
		Connection	IEC320 C20
		Overload Protection	Circuit breaker (UL1077)
Measurement		Other	
Current	+/-2%+/-0.1A @0.2A ~ 20A	ENV Connection	RJ11
Dimension/Weight		Operation	
Net Size	432 x 162 x 44.5 mm	Operation Temp.	0 ~ 45°C
Net Weight	3.5 kg	Operation Humid.	0% ~ 90% RH
Package Size	505 x 210 x 90 mm	Storage Temp.	-20°C ~ 65°C
Package Weight	3.8 kg	Storage Humid.	0% ~ 90% RH
Approval			
Certification	CE, FCC		
Warranty	2 years		

Package


No.	Description
1	PDU 1 set
2	Rack mount accessories 1 set
3	Software CD (manual, MIB)
4	C19 to NEMA 5-20P, power cord, 3m

Accessory


Model Number	Model Name
CPM-ENV-2	Temp./Humidity probe (ENV)
STR-C14-B	C13 socket protection



Line Drawing

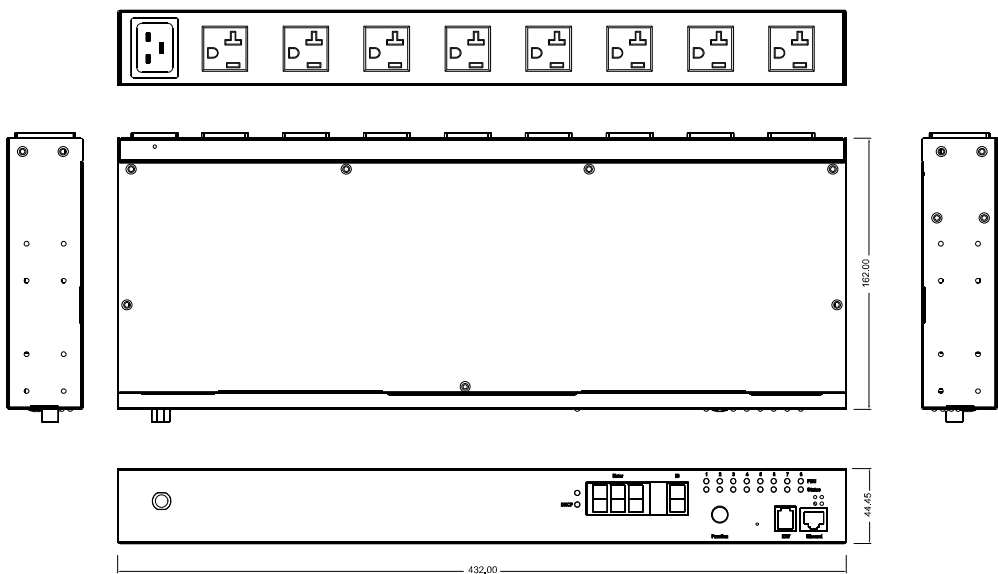

PSH-3020P-08N8

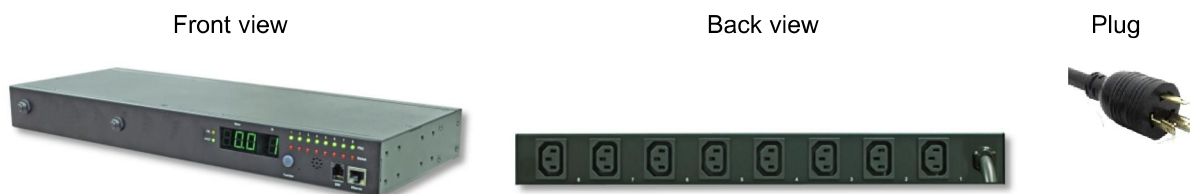

Specification

Output		Input	
Voltage	200-240 VAC	Voltage	200-240 VAC
Max. Current	30 A	Frequency	50/60Hz, full range
Outlet	(8) IEC320 C13	Max. Capacity	7360 VA
		Connection	NEMA L6-30P, power cord, 3m
		Overload Protection	(2) 16A circuit breaker (UL1077)
Measurement		Other	
Current	+/-2%+/-0.1A @0.2A ~ 20A	ENV Connection	RJ11
Dimension/Weight		Operation	
Net Size	432 x 162 x 44.5 mm	Operation Temp.	0 ~ 45°C
Net Weight	4.0 kg	Operation Humid.	0% ~ 90% RH
Package Size	490 x 330 x 155 mm	Storage Temp.	-20°C ~ 65°C
Package Weight	4.6 kg	Storage Humid.	0% ~ 90% RH
Approval			
Certification	CE, FCC		
Warranty	2 years		

Package


No.	Description
1	PDU 1 set
2	Rack mount accessories 1 set
3	Software CD (manual, MIB)

Accessory

Model Number	Model Name
CPM-ENV-2	Temp./Humidity probe (ENV)
STR-C14-B	C13 socket protection



Line Drawing

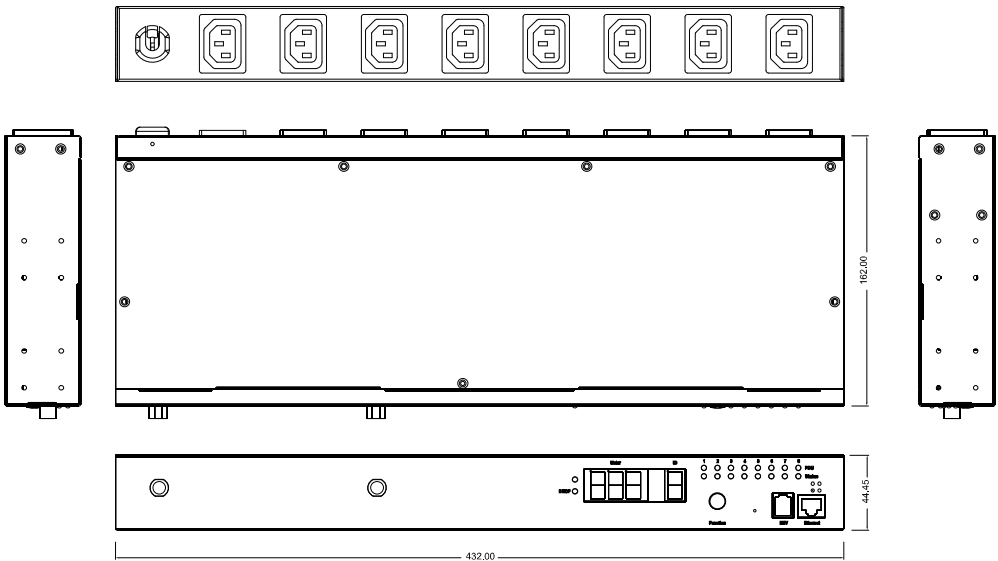

P2H-3020P-08N8

Front view



Back view



Plug



Specification

Output		Input	
Voltage	200-240 VAC	Voltage	200-240 VAC
Max. Current	2 x 30 A	Frequency	50/60Hz, full range
Outlet	(8) IEC320 C19	Max. Capacity	1.24 kVA
		Connection	(2) NEMA L6-30P, power cord, 3m
		Overload Protection	(4) 16A circuit breaker (UL1077)
Measurement		Other	
Current	+/-2%+/-0.1A @0.2A ~ 20A	ENV Connection	RJ11
Dimension/Weight		Operation	
Net Size	432 x 216 x 44.8 mm	Operation Temp.	0 ~ 45°C
Net Weight	4.0 kg	Operation Humid.	0% ~ 90% RH
Package Size	490 x 330 x 155 mm	Storage Temp.	-20°C ~ 65°C
Package Weight	4.6 kg	Storage Humid.	0% ~ 90% RH
Approval			
Certification	CE, FCC		
Warranty	2 years		

Package


No.	Description
1	PDU 1 set
2	Rack mount accessories 1 set
3	Software CD (manual, MIB)

Accessory

Model Number	Model Name
CPM-ENV-2	Temp./Humidity probe (ENV)
STR-C14-B	C13 socket protection



Line Drawing

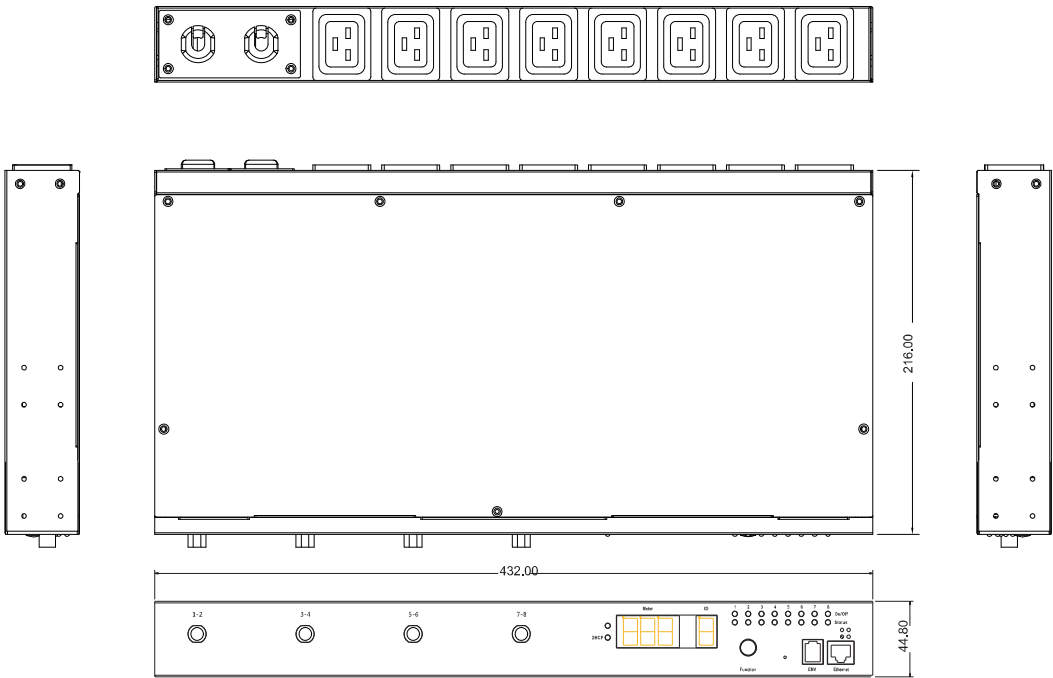

PHH-15111A-08N8



Specification

Output		Input	
Voltage	100-127 VAC	Voltage	100-127 VAC
Max. Current	15 A	Frequency	50/60Hz, full range
Outlet	(8) NEMA 5-15/20R	Max. Capacity	3680 VA
		Connection	IEC320 C20
		Overload Protection	Circuit breaker (UL1077)
Measurement		Other	
Current	+/-2%+/-0.1A @0.2A ~ 20A	ENV Connection	RJ11
Voltage	+/- 1% +/- 1V @80V~260V		
Active Power	+/- 1% +/- 5W @50W~8000W		
Apparent Power	+/- 1% @50VA~8000VA		
Frequency	+/- 1% @50~65Hz		
Power Factor	+/- 1% @0.1~1.0		
kWh	.001kWh~99999.999kWh, (+/- 1% @50W~8000W) kh=1.0		
Dimension/Weight		Operation	
Net Size	432 x 216 x 44.5 mm	Operation Temp.	0 ~ 45℃
Net Weight	3.8 kg	Operation Humid.	0% ~ 90% RH

Package Size 490 x 330 x 155 mm

Storage Temp. -20℃ ~ 65℃

Package Weight 4.4 kg

Storage Humid. 0% ~ 90% RH

Approval

Certification CE, FCC

Warranty 2 years


Package

No.	Description
1	PDU 1 set
2	Rack mount accessories 1 set
3	Software CD (manual, MIB)
4	C19 to NEMA 5-15P, power cord, 3m

Accessory

Model Number	Model Name
CPM-ENV-2	Temp./Humidity probe (ENV)


Line Drawing

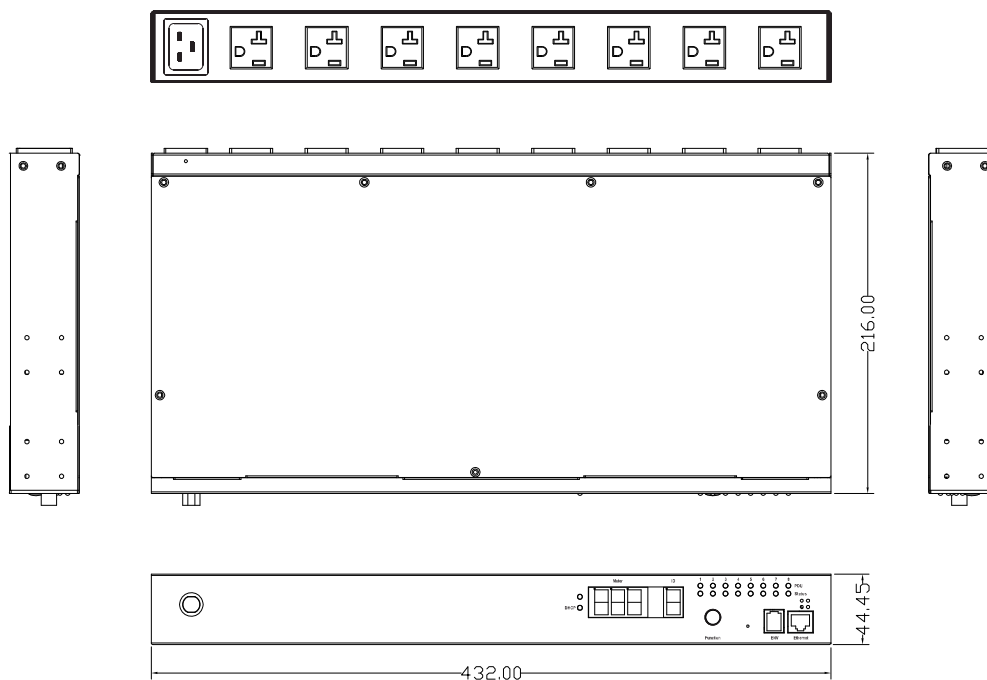


Annex. 1

Ping Function

The device responds PING normally

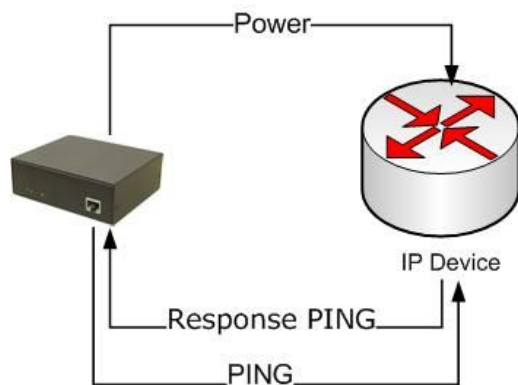

The device is not responding PING properly

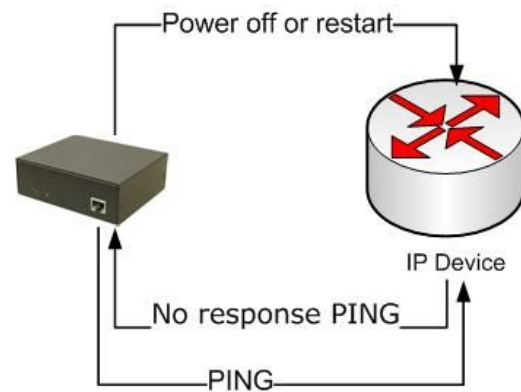

Annex. 2

Temp./Humidity Probe



Specification

Hardware			
Connection	RJ11, cord 1.8m		
Temperature		Humidity	
Range	-30°C~70°C	Range	0~100%
Resolution	0.1°C	Resolution	0.1%
Precision	±1°C	Precision@ 5°C~60°C, 20%~80%	± 3%
		Precision@ other condition	±5%
		Sampling rate	1 second
Operation		Dimension/Weight	
Operation Temp.	0°C~50.0°C	Size	127 x 22 x 20 mm
Storage Temp.	-20.0°C~60.0°C	Weight	62 g
		Package Size	185 x 110 x 56 mm
		Package Weight	110 g